NINGBO EXCELLENCE COMMUNICATED CONNECTOR CO.,LTD

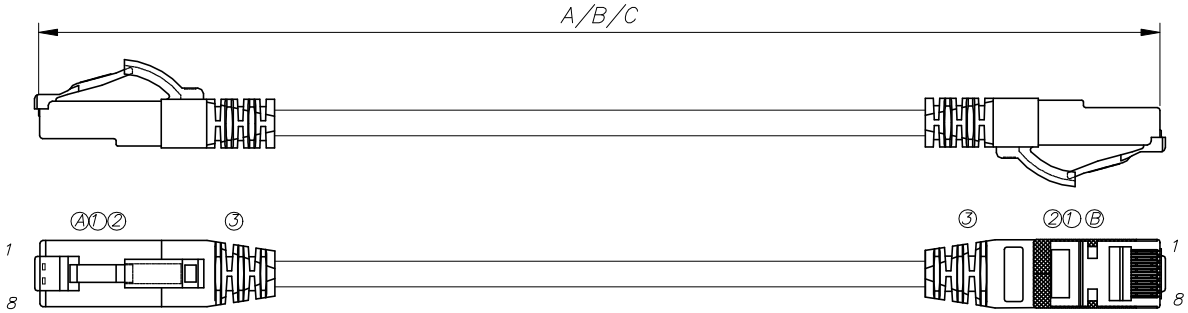

PLUG:

Drawing					
Mark					✓

GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"
Mark						✓

TYPE	Shielded	Unshielded
Mark	✓	

PC	UL 94-V0	UL 94-V2
Mark		✓

The cable / plug / molding with antibacterial material.
Antimicrobial activity complies with ISO 22196:2011

- Smoke Density: IEC61034-2
- Halogen Amount: IEC60754-2

ARRANGE METHOD:



RoHS

Issued
2021.11.25
R&D

Remarks:

I. "A" indicate the length 1~9M, tolerance $^{+80}_{-0}$

II. "B" indicate the length 10~20M, tolerance $^{+150}_{-0}$

III. "C" indicate the length above 20M, tolerance +(C*1%)/-0

ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY
①	PLUG	C6R5Z50V2SIL	transparent	2	⑥				
②	Insert	I1.1 V2	transparent	2	⑦				
③	PVC	60P	\	8g	⑧				
④	Cable Tie	"C"MM	white	2	⑨				
⑤					⑩				

DWG NO. P60S/FTB032-001

TITLE

Antibacterial Patch Cord-Cat.6 S/FTP

WIRE CONNECTION TABLE

MATERIAL			white / orange	orange	white/ green	blue	white / blue	green	white / brown	brown
CAT.6 S/FTP PATCH CORD 26AWG	PVC		A1	A2	A3	A4	A5	A6	A7	A8
	LSOH	✓	B1	B2	B3	B4	B5	B6	B7	B8
CABLE COLOR		red	orange	yellow	green	blue	purple	gray	white	black

LENGTH	TOTAL	MOLD NO.
(A/B/C+80)*[19(0)]*[19(0)]		02-032

UNIT	SCALE	SHEET
mm	1/1	1/1
DRAWN DATE 2013/01/24	PROJ.	REV 1
APPROVAL Carine	CHECKED Zach	DRAWN CathyLi