




ARRANGE METHOD:



- Remark:**
- ① Cable: CAT.5E FTP, Stranded Bare Copper, 4Pair Wires, 30AWG, Jacket PVC, OD: 2.8*8.6mm, Flat Cable.
 - ② Plug: CAT.5 shielded type plug with 2 Prongs, 50U", 8P8C, UL94-V2, mating cycle > 1200.
 - ③ Packing: IPC/PE Bag with label.
- Testing: 100% Continuity Test. (Component test Optional).
All materials are RoHS compliant.

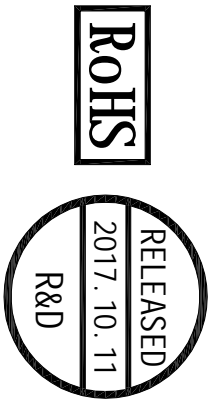

CUT LINE AND ARRANGE CRITERION				CUT LINE AND ARRANGE CRITERION			
No.	Total length (MM)	no. of patch cord	Cable tie (MM)	No.	Total length (MM)	no. of patch cord	Cable tie (MM)
1	300	A	B	19	13000	A	C
2	500	/	/	20	14000		
3	1000	/	/	21	15000		
4	1500	175	60	22	16000		
5	2000		70	23	17000		
6	2500		80	24	18000		
7	3000	195	95	25	19000		
8	3500		100	26	20000		
9	4000		110	27	25000	120	265
10	5000		120	28	30000		315
11	6000		130	29	40000		365
12	7000		135	30	50000		415
13	7500		140	31	60000		465
14	8000	135	145	32	70000		515
15	9000		150	33	80000		565
16	10000		165	34	90000		615
17	11000		170	35	100000		665
18	12000	120	175	36			

WIRE CONNECTION TABLE								LENGTH		MOLD NO.	
white/ orange	white/ green	blue	white/ blue	blue	white/ green	white/ brown	white/ brown	(1-20)14(0)14(0)	02-138		
A1	A2	A3	A4	A5	A6	A7	A8				
B1	B2	B3	B4	B5	B6	B7	B8				

DWG. NO. PSEFTTB138-001			
TITLE CAT.5E FTP FLAT PATCH CORD			
UNIT	SCALE	SHEET	
mm	1/1	1/1	
DRAWN DATE	PROJ.	REV	
2017/10/11		1	
APPROVAL	CHECKED	DRAWN	
		CathyLi	