




NINGBO EXCELLENCE COMMUNICATED CONNECTOR CO.,LTD

A/B/C

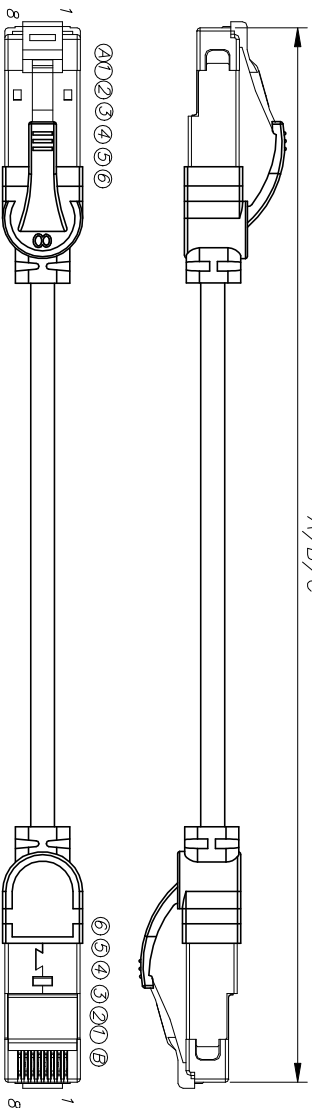

Drawing						
Mark				✓		
GOLD PLATING	3Mu "	3u "	6u "	15u "	30u "	50u "
Mark						✓
TYPE	Shielded	Unshielded				
Mark	✓					
PC	UL 94-V0	UL 94-V2				
Mark		✓				



PLUG:

- Smoke Density: IEC61034-2
- Halogen Amount: IEC60754-2

Remarks:

- I. "A" indicate the length 1-9M, tolerance $+80$
- II. "B" indicate the length 10-20M, tolerance $+150$
- III. "C" indicate the length above 20M, tolerance $+(C*1\%)/-0$

ARRANGE METHOD:



ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	DWG NO.					
①	PLUG	C6RZ50V2SL-3H	transparent	2	⑥	PVC	60P	/	2,92g	P80SSTB213-003					
②	Insert	3H 11.1 V2	transparent	2	⑦	Cable Tie	"C"MM	white	2						
③	Cross Insert	3E SLV2(UP) Ø5.8	transparent	2	⑧					TITLE					
④	Cross Insert	Ø6.2	/	2	⑨					CAT.8 SSTP PATCH CORD					
⑤	PVC	30P	/	3,78g	⑩										
MATERIAL		WIRE CONNECTION		TABLE		LENGTH		TOTAL		MOLD NO.					
CAT.8 SSTP PATCH CORD 26AWG	PVC	white / orange	white / green	blue	white / blue	green / brown	(A/B/C+80)*[25(0)]*[25(0)]	02-213	UNIT	mm	SCALE	1/1	SHEET	1/1	
	LSOH	B1	B2	B3	B4	B5	B6	B7	B8	DRAWN DATE	2021/08/09	PROJ.	REV	1	
CABLE COLOR	red	orange	yellow	green	blue	purple	gray	white	black	APPROVAL	Carline	CHECKED	Zach	DRAWN	Cathyli